

# E-Series Frame Tents





# Overview

The E-Series frame gives you a customizable event structure that can be left in place for days or weeks at a time and requires no previous experience or special tools to setup.

## Key Benefits:

- Average Turnaround Time: 2 Weeks
- Semi-Permanent Event Structure with Structural Analysis Reports & Certified Wind Ratings
- 20–30-minute installation that requires no special tools or previous experience
- Customize every inch of the canopy and walls with your logo, branding, and any other graphic
- Portable heating/cooling units for temperature-controlled environments





# Framework

The E-Series Framework features:


- **Tension cables:** The tension cross cables of our tents are all coated with heavy-duty white plastic coating. This coating makes the cables less likely to splinter or fray, and provides a cleaner, more finished look
- **Framework:** Stand frame tent models have 2" leg diameter. To meet higher wind load requirements, we increased the E-Series leg and perimeter pole diameter to 2.25" and increased the aluminum wall thickness to 3/16"
- **Corner Brackets:** All the corner brackets and footpads are made from heat-treated cast aluminum for added strength and lasting performance
- **Center Pole:** The floating center pole design creates an unobstructed space. The cables have a nylon-plastic clear coat to protect from fraying and reduce friction, helping the center pole glide into place
- **Ratchet straps:** All ratchet straps feature a vinyl covering to hide the ratchet itself. This creates a cleaner, finished product
- **Peak Caps:** The peak is made of two aluminum plates that are bolted together for added strength and lasting performance



# Canopy

The E-Series Frame Tent Canopy features:

- 18 oz vinyl
- Hot-air welded for waterproof seal
- Fire-rated – NFPA 701-2 Standard
- Canopy Tension: Canopies are fashioned with heavy-duty webbing tensioning system rather than a pull rope. Pull-rope systems eventually wear through the vinyl after extended use. Webbing maintains it's strength over a longer period of time
- Corners: The corners of our tents are fashioned with flaps, which allows you to cover the corner bracket and in turn provides a finished, professional look to the tent canopy

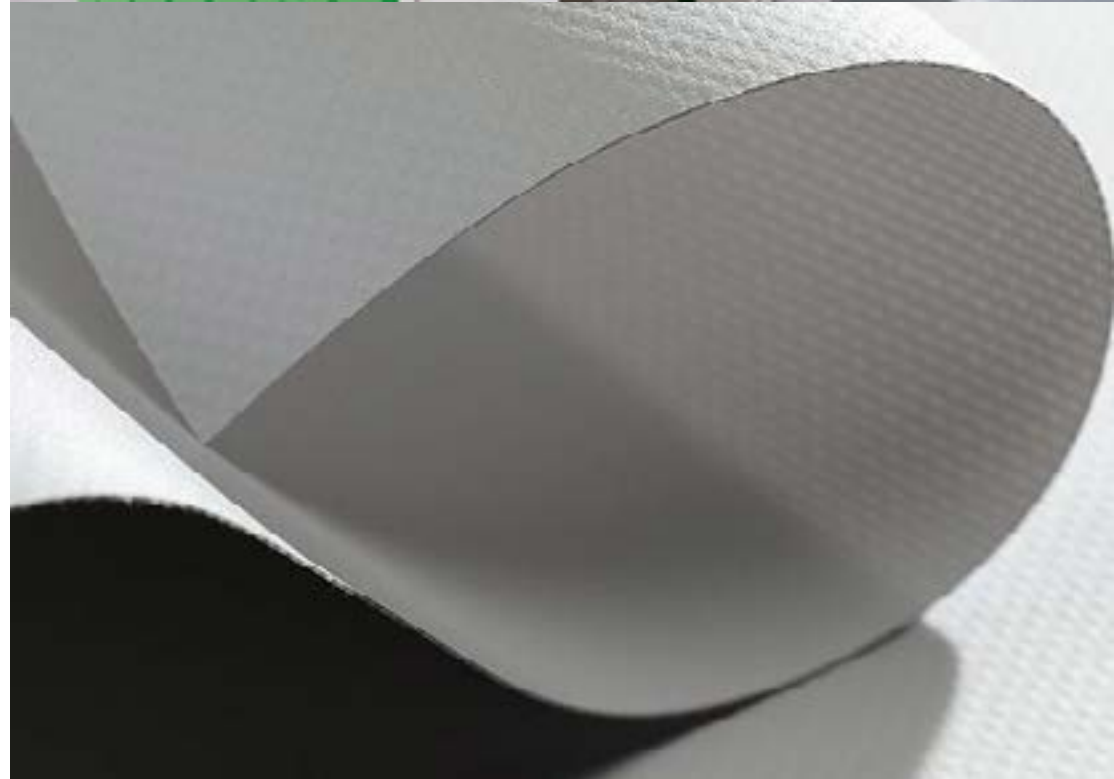

# Customization & Accessories

Digital printing, walls, lighting, portable heating and cooling units, and water barrel ballasting systems can complete your E-Series Frame Tent Setup



# E-Series Frame Tent Sizes & Specs



## **10x10 E-Series**

Head Clearance: 8'

Peak Height: 13' 2"

Setup Time: 20-30 min. with 1-2 people



## **15x15 E-Series**

Head Clearance: 8'

Peak Height: 15' 1"

Setup Time: 20-30 min. with 2 people



## **20x20 E-Series**

Head Clearance: 8'

Peak Height: 16' 11"

Setup Time: 20-30 min. with 2-4 people

# E-Series Frame Tent Wind Ratings



10x10	Roof Only	Roof + Open Walls	Roof + Full Walls
MPH	100	80	80



15x15	Roof Only	Roof + Open Walls	Roof + Full Walls
MPH	80	60	60



20x20	Roof Only	Roof + Open Walls	Roof + Full Walls
MPH	65	50	50

Wind ratings are valid only with proper ballasting. For more information, please consult the following Engineering Documents: [10x10](#), [15x15](#), [20x20](#)