


# HOW TO SETUP

 TentCraft | **MONARCHSTALL**

**An easy-to-transport market stall.  
2-person setup.**




- 1 To start, remove all parts of the structure from the transport bag and lay out all frame parts on the ground in front of you as shown.

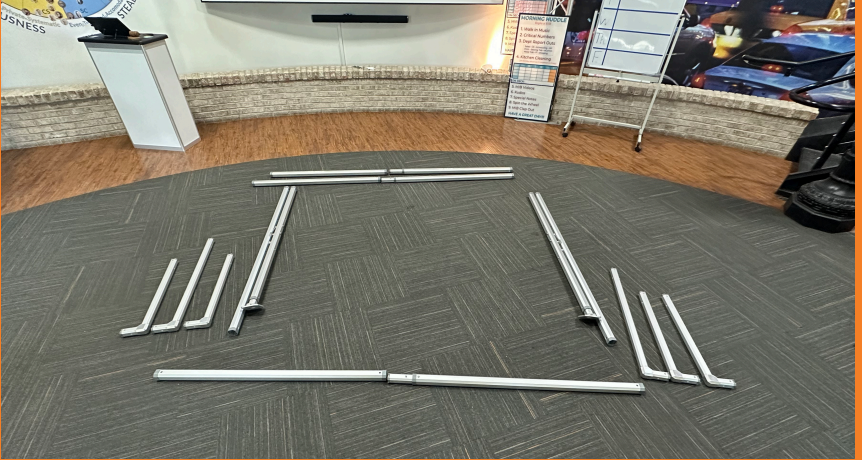

- 2 Find the two back poles that are laser etched with "TOP BACK" and connect them together until the button securely clicks in place.



- 3** Connect the remaining poles together the same way. You should have (3) complete poles once you are finished.

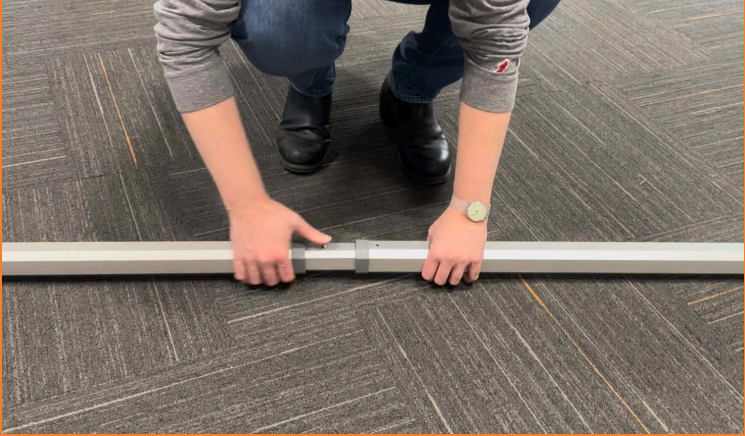

- 4** Lift the "X" frame pieces and latch the steel hook. It will sit above the point of connection.

The footpad should be sitting flat at the front of the structure. The footpad should be on the inner leg.



**5** Insert the long "L" shaped elbows into the front top of frame. The buttons should face inward.



**6** Insert the 4 short elbows into the back of the frame. The buttons should face inward.



*The next step can be done with the frame in the standing position but we recommend laying the frame back down for greater stability.*

- 7** Grab the laser etched “BACK TOP” bar and connect it to the elbow brackets. (The opposite side of this piece ends in footpads.) Connect it by inserting the pole over the smaller, corner pole piece until it clicks in place. Repeat this step with the non-labeled poles.



- 8** Lift up the top “X” frame pieces and latch the steel stabilizer hook over the catch on the opposite pole. This locks the “X” in place. The footpad will be on the inside of the frame.




- 9 Drape the roof over the top of the frame. Wrap the front edge of the roof around the front bar of the frame. Use the Velcro to secure it. The front edge of the soft goods are labeled “ROOF IN”.



*(If you have a valence you will see a strip of Velcro on this front edge. This is where you will later attach your valence.)*

- 10** Wrap the bottom of the roof around the bottom back wall of the frame. Use the Velcro to secure this piece.  
The bottom of the wall is labeled "WALL IN".

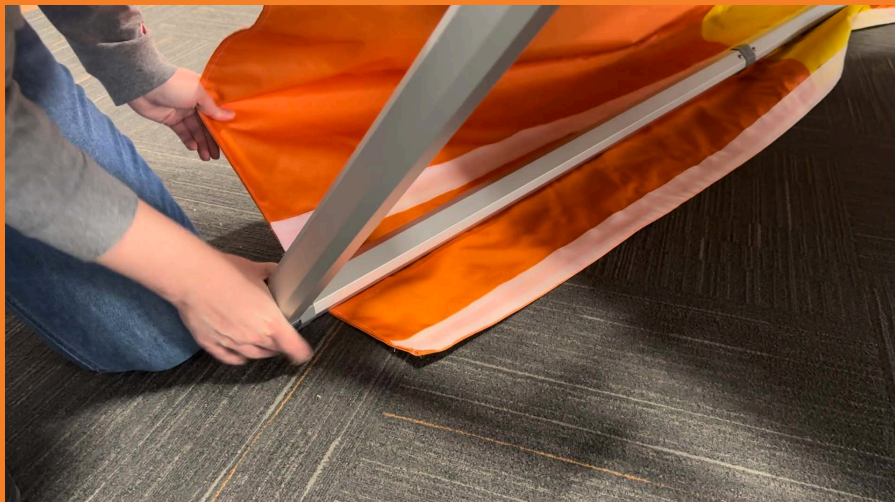

- 11** If you have a valence, attach it using the Velcro on the front edge.



12

Extend the top and bottom 4 legs of each X. To extend, press the button and pull out the pole until it locks, extended, in place. Repeat this step for the remaining legs.



13

Enjoy Your **MONARCHSTALL!**







Proper ballasting is the key to a long and happy life for tents. Use the included sandbags on the rear legs and the stake kit or footplates on the front legs.

Remember to take your stall down at night, or while not in use.