


WATER BARREL

SETUP INSTRUCTIONS

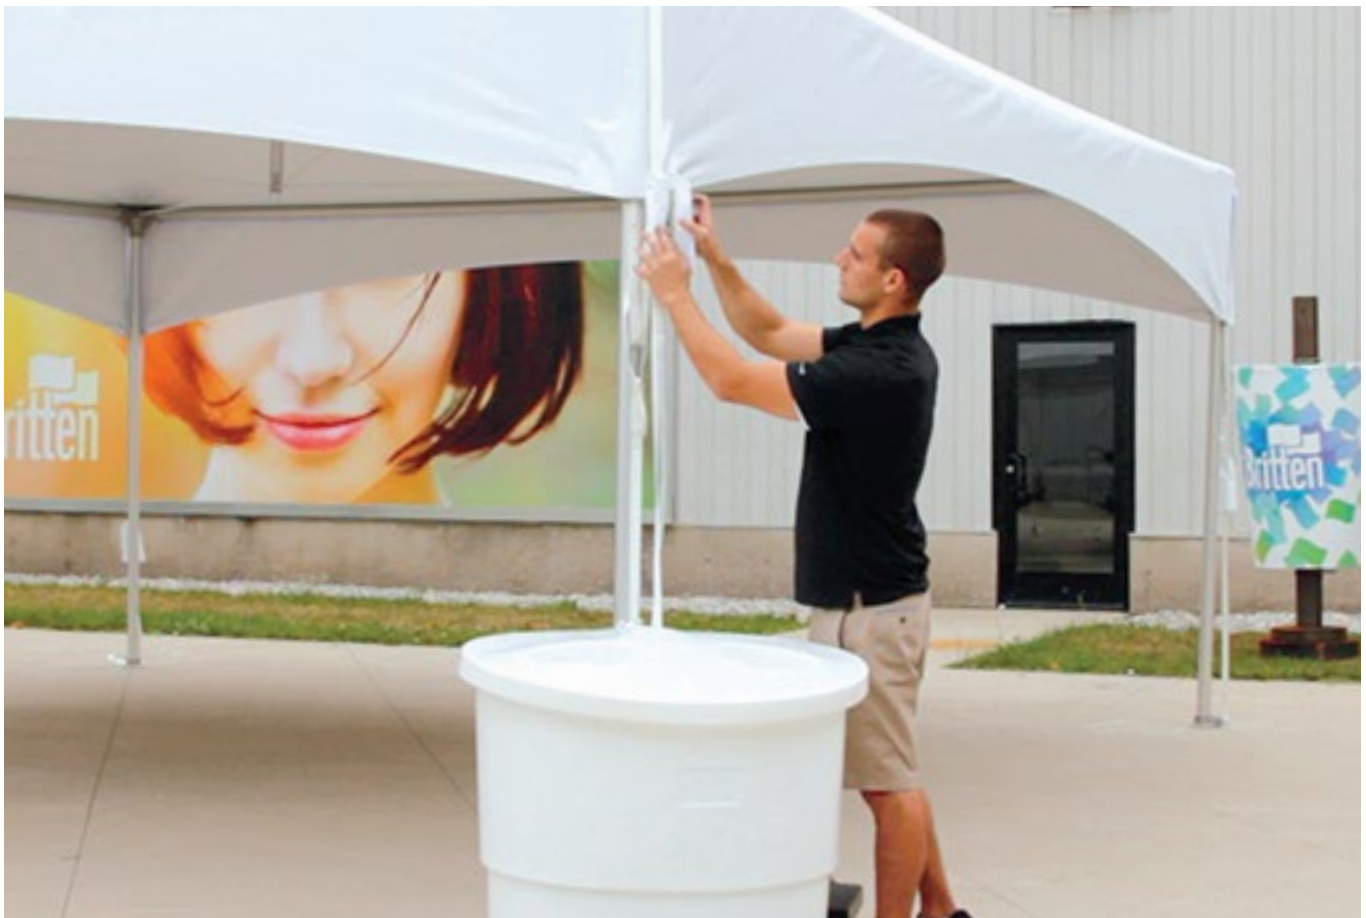

THANK YOU FOR YOUR PURCHASE!

If you have questions about installation, maintenance, or take down, please call us at (800)950-4553. Our goal is that you are completely satisfied with our products. Please read this installation manual carefully and follow all instructions contained herein. Please note that the installer is responsible for the site selection, installation and use. Do not erect during inclement weather and follow all safety procedures during the installation and take down process.

Please contact all utility companies for underground services. In many states, the utilities work together and have formed a Utility Locating Service. It is your responsibility to locate all the underground services, including speaking to the owner about irrigation, pool and other special services that they may have installed. Also, please note that special precautions should be taken such that any overhead powerlines are duly noted and avoided during the tent erection process.



TentCraft Inc in no way represents the estimated holding power to be true in all cases. It is an estimate, and as such, does not imply that the figures are sufficient to hold any tent securely in windy or adverse weather conditions. The tent installer accepts sole responsibility for the safe installation, teardown, and maintenance of any tent. TentCraft does not represent in any way that the materials provided with the purchase of the tent are sufficient enough to hold it up in windy or adverse weather conditions. There is no way for TentCraft to know the site conditions or the weather conditions at the event to be able to recommend the adequate amount of holding power needed to hold the tent safely in position. Furthermore, we are not responsible for the methods which the installer uses to erect the tent or anchor it in position. Installers **MUST** be empowered to deem the tent unsafe for occupancy if/when the weather becomes unstable. For further recommendations on determining necessary staking values, please consult the IFAI Procedural Handbook for the Safe Installation and Maintenance of Tentage and the IFAI's Pullout Capacity of Tent Stakes. These resources are available from the IFAI Tent Rental Division.

Step 1



Place the water barrel at the base of the tent leg and make sure to turn the barrel so the tent tie down strap fits into the vertical groove on the barrel.

Step 2




Connect the top carabiner on the outguy strap to the metal loop on the tent bracket.

Step 3



Connect the bottom carabiner on the outguy strap to the metal loop that is located on the bottom of the inside of the water barrel. Be sure that the remainder of the strap is outside of the barrel before moving on to the next step.

Step 4

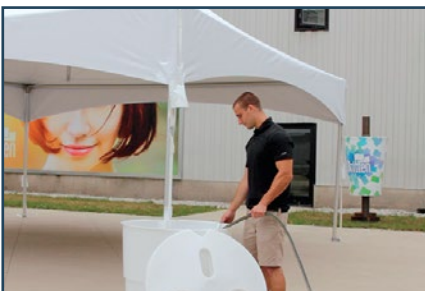

Fill the barrel with water until it is completely full.


Step 5



Place the top onto the barrel, making sure to run the outguy strap through the hole in the top.

***If the setup includes a water barrel cover, slip it over the water barrel at this time, making sure to feed the outguy strap through the hole in the cover and zip the closure along the back.**

Step 6

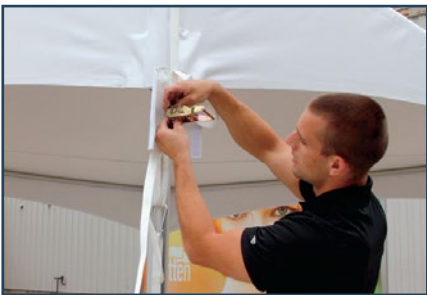

Once the lid is secure, feed the end of the bottom strap up into the ratchet that is located at the bottom end of the top strap (this is the strap installed in step 2).

Step 7



Tighten the strap using the ratchet until it is taugt enough to secure the tent corner.

Step 8



Once the tent is secured to all water barrels, fold the extra outguy strap length into the white vinyl covers with Velcro closure.