

HOW TO SETUP



Silicone Edged Graphic
Soft Good Installation

Follow these steps to ensure proper installation of your graphics.



- 1 After fully setting up your SEG frame (printed hardware instructions are included separately), begin SEG graphic installation starting first in the corners of the frame.



- 2 To insert the SEG edge, use your thumb and forefinger to tuck the silicone edge and press it into the frame channel. The stitching should be fully inserted into the channel and will not show.




- 3** Once all four corners are in place, push the silicone bead into the middle of each frame side.



- 4** After the corners and centers of each panel are inserted, work your way around the perimeter of the frame starting from the middle and working your way out, pushing the silicone edge in securely.



5 To ensure the best fit, go around the perimeter again and smooth any ripples.

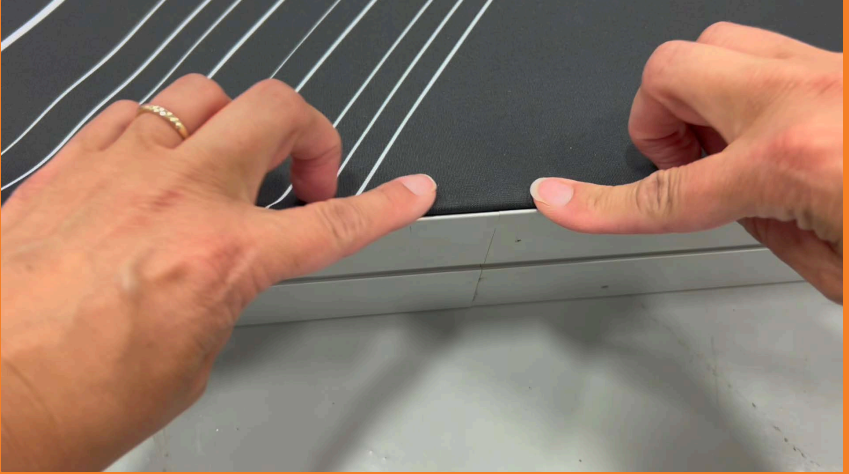

Tent**Craft**.com/support

